
PURE sigma

Connect any spreader to PURE Sigma side plough platform, lift and lock PURE Sigma on the carrier and you are ready for winter roadwork. Take care of snow with PURE Delta⁴ side plough and use spreader for antiskid treatment.

Then unlock PURE Sigma, leave it on support legs and you have your truck fast and easily ready for any other use.





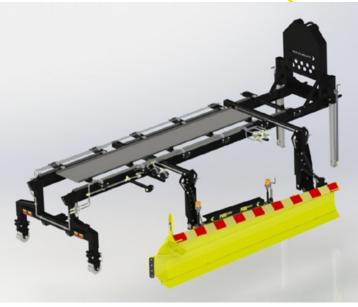

PURE Road Maintenance

Tel +358 10 2321 000 www.pajakulma.fi



PURE sigma

PURE SIGMA SIDE PLOUGH PLATFORM WITH PURE DELTA4 SIDE PLOUGH

Max working width 3950 mm Total width of blade 4450 mm Blade height 1050 mm Blade weight 700 kg 0-60° Ploughing angle Blade angle 60°

Required hydraulic flow 100 l/min / 210 bar

Transportation width of side plough 570 mm

approx. 2700 kg ' Weight without spreader


Weight without spreader and approx. 1900 kg

side plough blade

x = depends on hook lift width

* Weights valid for longest possible frame.



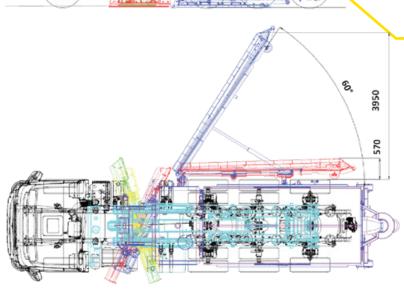

PURE Road Maintenance

Tel +358 10 2321 000 www.pajakulma.fi

